


H=1570 CH=1050 (mm)

Capacity class of the hookloader: 260 kN

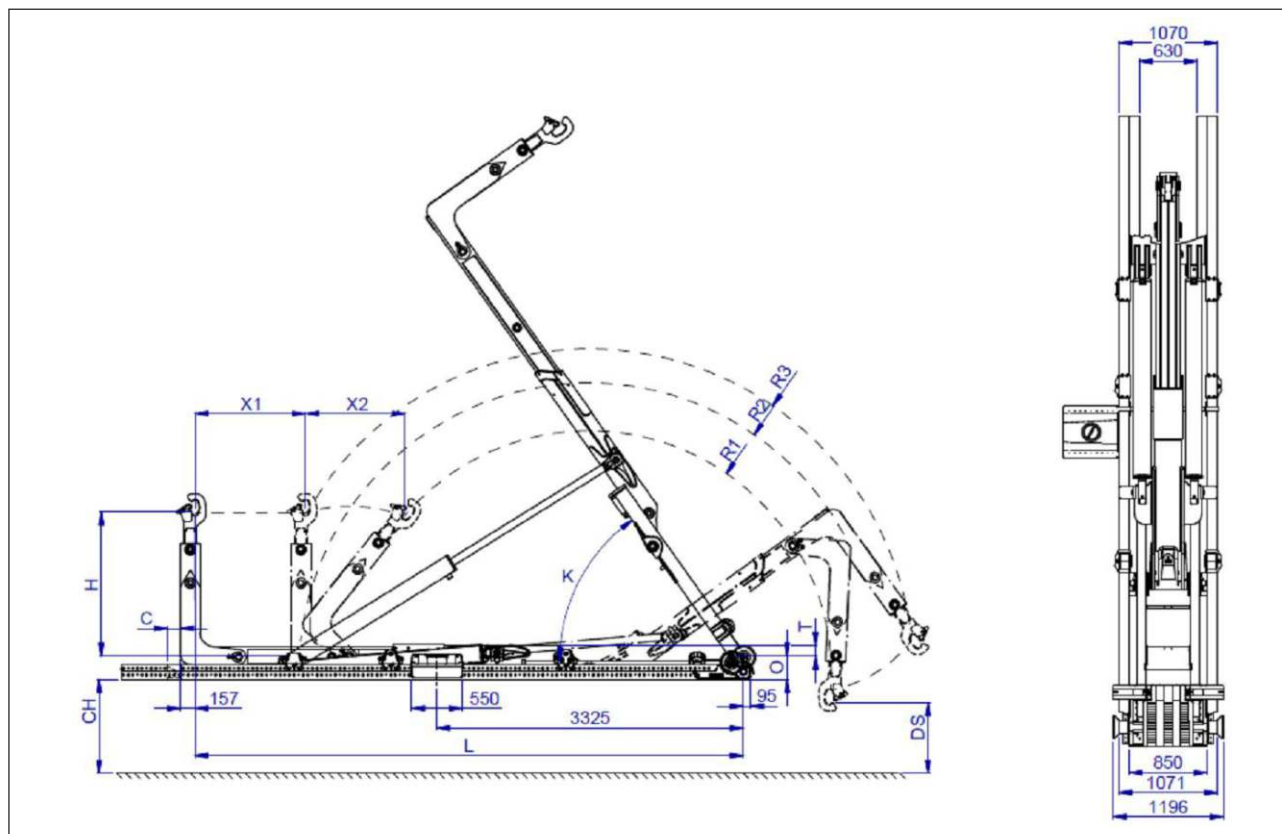

TYPE:	T26-49-SKZ	T26-51-SKZ	T26-53-SKZ	T26-55-SKZ	T26-57-SKZ	T26-60-SKZ	T26-62-SKZ	T26-65-SKZ	T26-67-SKZ
Description	Parameters	Parameters	Parameters	Parameters	Parameters	Parameters	Parameters	Parameters	Parameters
X1 (mm)	700	800	1000	900	1000	1200	1200	1400	1400
X2 (mm)	+1150	+1150	+1150	+1150	+1150	+1150	+1150	+1150	+1150
L (mm)	4900	5050	5300	5500	5700	5950	6200	6450	6650
O (mm)	280	280	280	310	310	310	310	310	310
K	53°	53°	53°	54°	54°	54°	54°	51°	51°
R1 (mm)	2330	2395	2395	2470	2545	2580	2770	2655	2810
R2 (mm)	2857	2857	2906	3004	3103	3152	3349	3250	3250
R3 (mm)	3323	3323	3366	3452	3538	3582	3757	3669	3669
T (mm)	120	120	120	120	120	120	120	120	120
Weight ¹ (kg)	2575	2625	2675	3050	3100	3150	3200	3250	3325
DS (mm)	700	765	765	745	805	835	990	895	1020
Min./max. container length (mm)	3150 - 6300	3150 - 6300	3200 - 6550	3500 - 6750	3600 - 6950	3650 - 7200	3900 - 7450	3950 - 7700	3950 - 7700
C (mm)	200	200	200	200	200	200	200	120	120
Loading (time) ² (s)	30	30	31	35	36	37	37	38	43
Unloading (time) ² (s)	38	38	39	45	45	46	46	46	51
Tipping (time) ² (s)	33	33	33	39	39	39	39	39	44
Fast unloading (time) ² (s)	12	12	12	14	14	14	14	14	16
Supplied Pump (l/min)	108	108	108	108	108	108	108	108	108

H = Hook height (mm)

CH = Chassis height (mm)

DS = Lowest pick up point (depending on hook- and chassis height) (mm)

¹ Rough estimation based on a standard system, filled with oil and without mounting kit accessories.

² Rough estimation based on PTO type C, pump 120 l/min., motor 1200rpm, PTO transmission i = 1.0 and dependent on cylinder thickness.

Pressure: 350 bar